

GeoFilter Oil


Art.no. 15-020 & 15-220

The GeoFilter Oil, available in two sizes, viz. 100 and 160 mm, is used for the removal of oil mist from cutting machines, before the mist reaches the central pipe system, thus avoiding condensation of the oil in the system. Size 100 is primarily used in connection with conventional lathes, millers, wet grinders, etc. Size 160 is basically used in connection with CNC processing centres and lathes.

8


Effective spot extraction

Shown below: 15-020 GeoFilter Oil 100



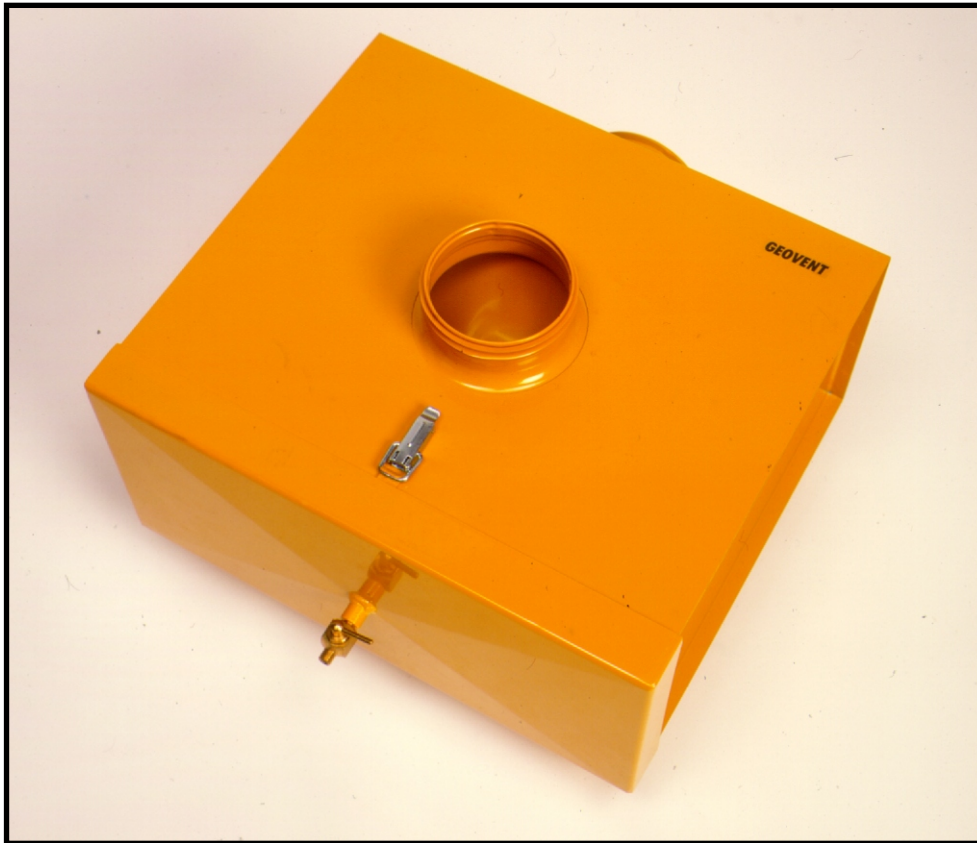


The filter medium, which is made of aluminium mat, is detachable via the removable bottom. The bottom is supplied with a discharge tap for captured oil, which is returned to the machine. The oil separator is executed in epoxy enamelled steel.

Filter area, size 100: 0.13 m²
 Filter area, size 160: 0.19 m²
 Separation efficiency: 95%

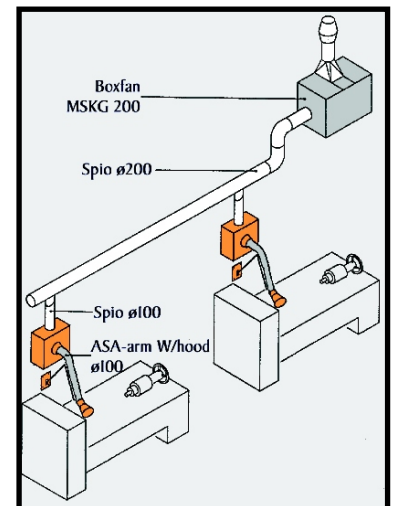

It is advisable to use an oil separator at each machine. In connection with the oil separator, the Mini Arm or ASA-2 Arm may be used, as shown in the above illustration.

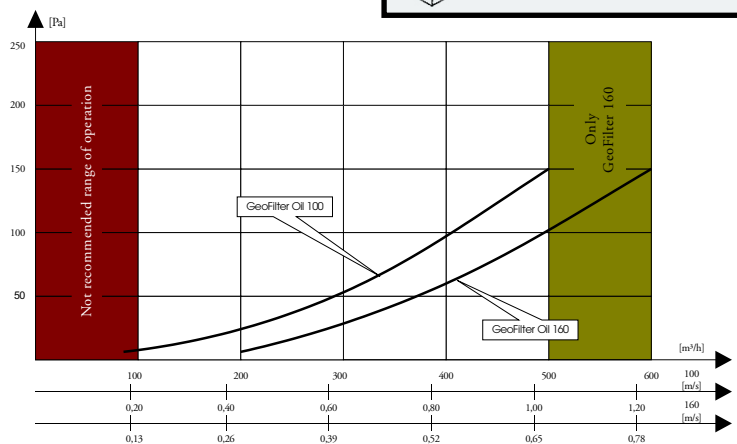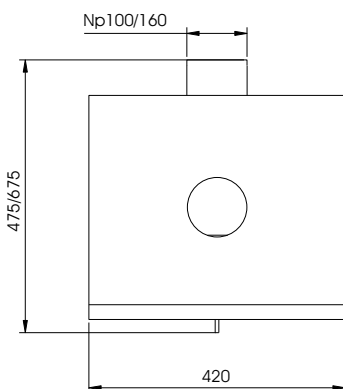

Accessories:

- 15-030 Replacement filter 100, 400 x 400
- 15-031 Replacement filter 160, 400 x 600

Please refer to data sheets for Extraction Arms.

GEOVENT

Hovedgaden 86
 DK-8831 Løgstrup
 Phone: (+45) 86 64 22 11
 Telefax: (+45) 86 64 30 75
 email: salg@geovent.dk
 www.geovent.com



March 2001