

Hose

GeoFlex P2A 1000

GeoFlex P2A 1000 for extraction of welding fumes, vapours, ventilation of tanks and loading hold etc. The hose is very suitable for use together with our extraction arms or portable fan PM-180-1.


9

Effective spot extraction

Light weight and very flexibel PVC hose



Now used on WING & COMPACT arms

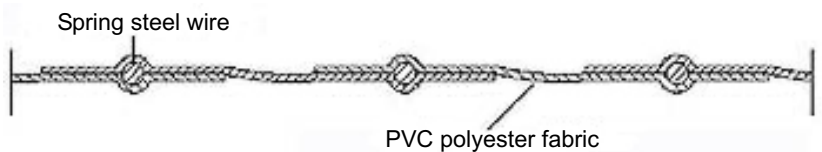

Material

PVC coated polyester fabric

Colour

Black

Length

5 or 10 m

Special-length after request

Temperature resistance

- 30 °C to + 100 °C.

Application

Air-conditioning,

Extraction of air and welding fumes

Properties

Light weight

Very flexible

Flame retardant according to DIN-4102

Good compressibility

Technical specifications					
Art. No.	Dia. [mm]	Weight [kg/m]	Bend. Rad. [mm]	Max. Work. Press. [kPa]	Max. vacuum [kPa]
09-300	30	0,10	21	0,90	0,25
09-301	40	0,11	28	0,90	0,20
09-302	50	0,13	35	0,80	0,20
09-303	60	0,16	42	0,80	0,16
09-304	70	0,20	49	0,70	0,14
09-305	75	0,22	53	0,60	0,10
09-306	80	0,24	56	0,60	0,10
09-307	100	0,30	70	0,50	0,09
09-308	120	0,35	85	0,50	0,08
09-310	125	0,38	88	0,50	0,08
09-311	140	0,42	95	0,35	0,06
09-312	150	0,45	105	0,20	0,06
09-313	175	0,63	123	0,20	0,05
09-314	200	0,72	140	0,20	0,05
09-315	250	0,90	175	0,10	0,04
09-316	300	1,08	210	0,06	0,03
09-317	350	1,26	245	0,05	0,02
09-318	400	1,45	280	0,04	0,02
09-319	450	1,63	315	0,03	0,01
09-320	500	1,82	350	0,02	0,01

GEOVENT

Hovedgaden 86
DK-8831 Løgstrup
Phone: (+45) 86 64 22 11
Telefax: (+45) 86 64 30 75
email: salg@geovent.dk
www.geovent.com



April 2001