

Hose


GeoFlex Standard

GeoFlex Standard is an allround hose for extraction welding fumes, grinding dust, vapours etc. The hose is used in the joint on the KOMFORT arm.

9

Effective spot extraction

Light weight and very flexible PVC-hose

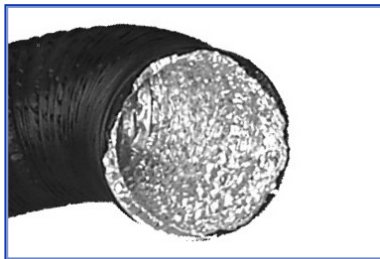

Material

PVC hose with aluminum foil, 6 layer laminate with steel spiral.

Colour

Black

Length

3 or 6 m
Special-length after request

Temperature resistance

- 30 °C to + 140 °C.

Application

Extraction of welding fumes, grinding dust, vapours etc.

Properties

Super light weight
High flexibility
Antistatic and spark-proof.

Technical specifications

Art. No.	Dia. [mm]	Weight [kg/m]	Bend. Rad. [mm]	Max. work press. [kPa]	Max. air flow. [m/s]
09-012	50	0,146	28	3	30
09-002	82	0,162	46	3	30
09-003	102	0,171	57	3	30
09-005	127	0,212	71	3	30
09-001	152	0,326	85	3	30
09-004	160	0,357	90	3	30
09-000	203	0,461	114	3	30
09-019	254	0,618	142	3	30

GEOVENT

Hovedgaden 86
DK-8831 Løgstrup
Phone: (+45) 86 64 22 11
Telefax: (+45) 86 64 30 75
email: salg@geovent.dk
www.geovent.com



April 2001