

Hose


GeoFlex Exhaust

GeoFlex Exhaust is used for extraction of exhaust gasses, welding fumes etc. The hose is very suitable for our hose reels and hose lift plus our channel duct type 25. The hose can be run over to a certain extent.

9

Effective spot extraction

Light weight and very flexible TPE-hose

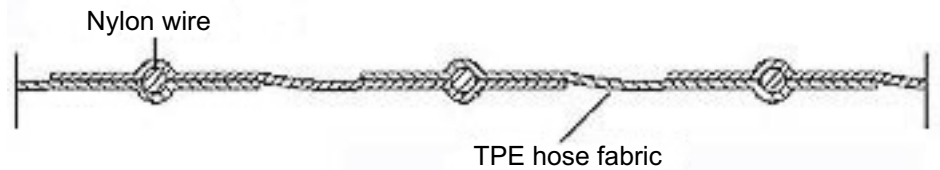

Material

TPE-coated-polyester fabric with polyamide wire.

Colour

Black

Length

5 - 7,5 - 10 - 15 m
Special-length after request.

Temperature Resistance

-40 °C to +150 °C. (Shortly 170 °C)

Applications

Extraction of exhaust gasses and welding fumes etc.

Properties

Super light weight
High flexibility
The outside running spiral minimizes pressure loss
Can be run over to a certain extent

Technical specifications

Art.No.	Dia. [mm]	Weight [kg/m]	Bend. Rad. [mm]	Wire thickness [mm]	Max. vacuum [kPa]
09-075	76	0,69	105	4,5	15
09-076	102	0,87	190	4,5	10
09-077	127	1,20	250	5,0	7,5
09-078	152	1,44	300	5,0	6,0

GEOVENT

Hovedgaden 86
DK-8831 Løgstrup
Phone: (+45) 86 64 22 11
Telefax: (+45) 86 64 30 75
email: salg@geovent.dk
www.geovent.com



April 2001