

Hose


GeoFlex Exhaust HT

GeoFlex Exhaust HT is a high temperature hose designed for extraction or air supply of hot air, fumes, smoke or dust within the industry. Suitable for extraction of exhaust gasses from big combines or excavator etc., or extraction of air from a heater.

9

Effective spot extraction

High temperature hose

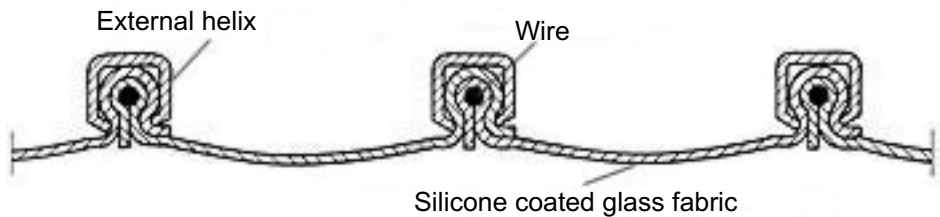

Material

Silicone coated glass fabric

Colour

Silver-grey

Length

3 or 6 m

Special-length after request

Temperature resistance

-60 °C to +300 °C

Application

Extraction of hot fumes, gasses or dust in all fields of industry

Properties

Good temperature resistance

Flame retardant

Outer wear strip

Very light weight

High flexibility and compressibility

Technical specifications

Art. No.	Dia. [mm]	Weight [kg/m]	Bend. Rad. [mm]	Max. Work. Press. [kPa]	Max. vacuum [kPa]
09-150	76	0,60	45	47	14
09-151	102	0,65	60	30	8
09-152	127	0,70	75	21	5
09-153	152	0,90	90	16	4
09-154	160	0,94	96	14	3
09-155	203	1,21	120	10	2
09-156	254	1,70	175	7	1
09-157	305	2,13	210	5	1

GEOVENT

Hovedgaden 86
DK-8831 Løgstrup
Phone: (+45) 86 64 22 11
Telefax: (+45) 86 64 30 75
email: salg@geovent.dk
www.geovent.com



April 2001