

Nozzle type ST

for exhaust gasses

Geovent Nozzle type ST, for exhaust gasses with adjustable binding nippers for fixing on exhaust pipes. Neopren rubber for protection of petticoat. Is made of epoxy painted steel Ral 1007. Available with or without a damper in the dimensions $\varnothing 100$, $\varnothing 125$ & $\varnothing 150$ mm. Also available with expanded diameter in the dim. 150-125 & 180-150mm.

3

Effective spot extraction

Nozzle type ST, epoxy painted with Nipper.




The Nozzle is very suitable for use on most cars or trucks with a single exhaust pipe. The nozzle can be mounted on a hose system with a coupling, hose lift, channel duct or on a hose reel.

Nozzle ST mounted on a hose lift.

Recommended air flow for smaller trucks w/ $\varnothing 125$ nozzle: 600-800 m³/h. Recommended air flow for bigger trucks w/ $\varnothing 150$ nozzle: 600-1200 m³/h.

Ordering table for Nozzle type ST

Art. No.	Model	Rec. Air flow. [m ³ /h]	Hose dia. [mm]
06-150	Nozzle type ST-100	400-600	$\varnothing 102$ mm
06-151	Nozzle type ST-125	600-800	$\varnothing 127$ mm
06-152	Nozzle type ST-150	600-1200	$\varnothing 152$ mm
06-153	Nozzle type ST-150-125	600-800	$\varnothing 127$ mm
06-154	Nozzle type ST-180-150	600-1200	$\varnothing 152$ mm
12-006	Throttle damper $\varnothing 100$ - easy	to install in nozzle	
12-012	Throttle damper $\varnothing 125$ - easy	to install in nozzle	
12-007	Throttle damper $\varnothing 150$ - easy	to install in nozzle	

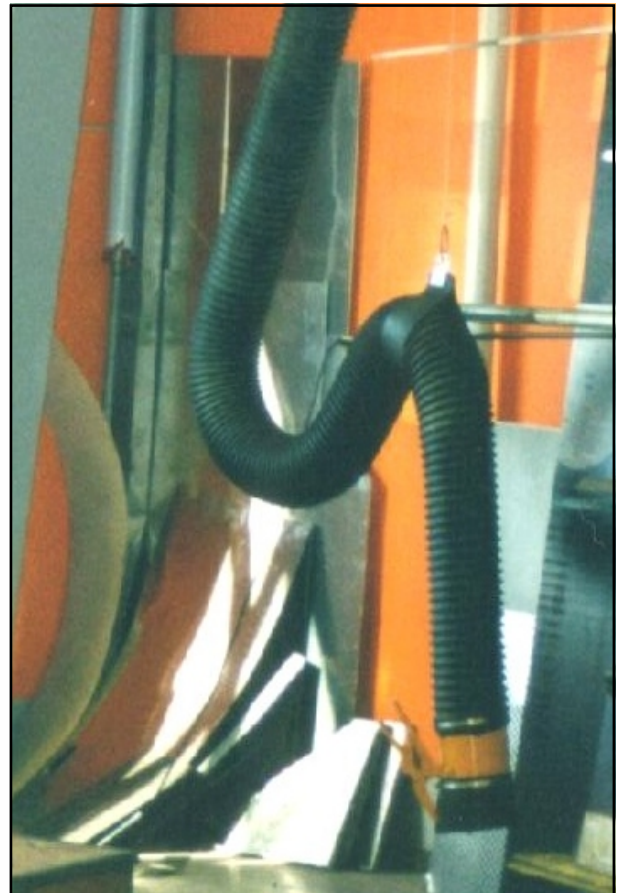

GEOVENT

Hovedgaden 86
DK-8831 Løgstrup
Phone: (+45) 86 64 22 11
Telefax: (+45) 86 64 30 75
email: salg@geovent.dk
www.geovent.com



April 2001