

# Fan



## PM-180-1

GEOVENT portable fan PM-180-1 is suitable for extraction of welding fumes, vapors etc., where it is not possible to establish a stationary place for extraction. Furthermore it can be used for extraction from or air supply into cargo areas, containers, etc.. Delivered complete, ready to use, with 2 x 5 m  $\varnothing$ 125 mm hose and aluminium funnel with 3 magnets..

4

### Effective spot extraction

Geovent portable fan

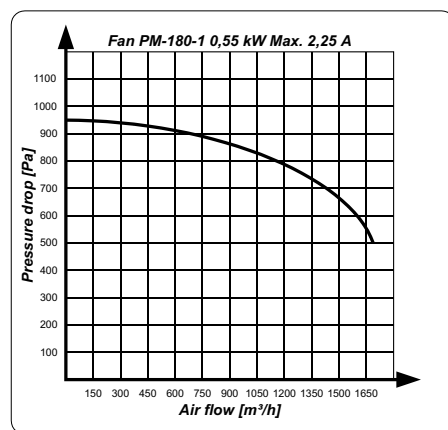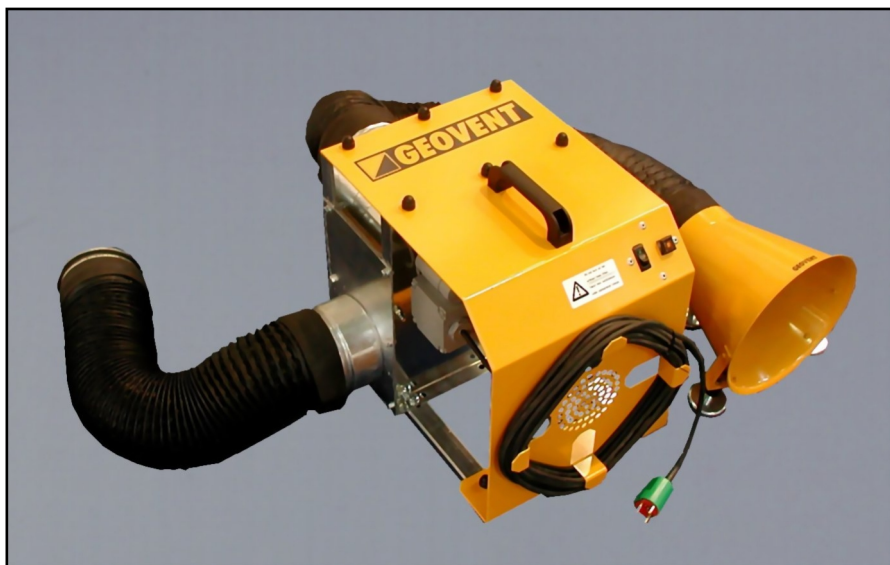

#### Electric data


1x230V 50/60 Hz, 0,55 kW  
start/stop switch and circuit breaker 3A

#### Air data

Air flow with out hose: 1400 m<sup>3</sup>/h  
Air flow with normal use of hose: 600 m<sup>3</sup>/h  
Air flow with fully extended hose : 70 m<sup>3</sup>/h

#### Misc. data

Made of galvanised sheet metal with epoxy coated carrying bracket. A screws and bolts are electroplated.  
Weight: 19.3 kg  
Sound level 68 dB(A)

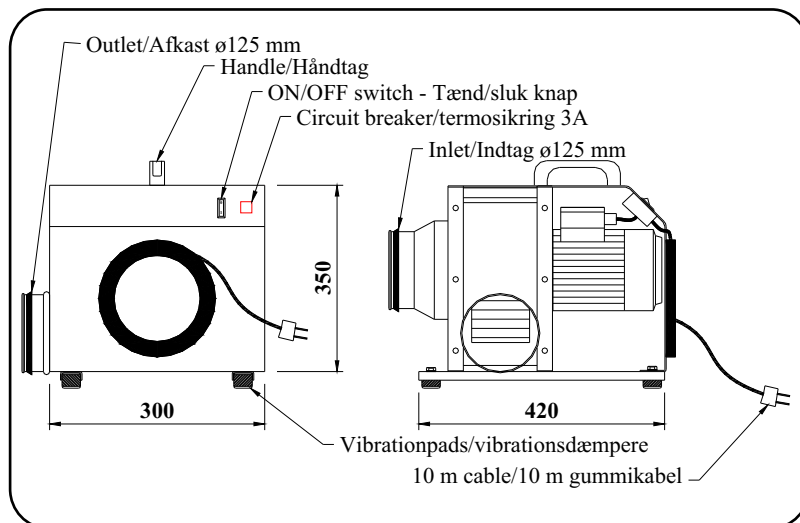

#### Features

2 x 5 m  $\varnothing$ 125 mm flexible and lightweight hose with socket fittings for easy on and off assembling.  
Epoxy coated funnel with 3 heavy duty magnets.  
ABS-plastic handle for high mobility of fan.

Art.No.: 30-006A

# GEOVENT

Hovedgaden 86  
DK-8831 Løgstrup  
Phone: (+45) 86 64 22 11  
Telefax: (+45) 86 64 30 75  
email: salg@geovent.dk  
www.geovent.com



March 2001